

# ASSEMBLY INSTRUCTIONS FOR CHANDELIER LIGHTING FIXTURE


## ELRB52I501

**NOTE:** Carefully unpack fixture and parts. Make sure all parts are included before discarding any packing materials

**WARNING: ELECTRICAL SHOCK CAN RESULT IN SERIOUS INJURY.**

Read and follow instructions exactly as shown. If instructions are unclear, do not proceed. Contact a qualified electrician. Read all instructions before beginning. Proper wiring is essential for safe operation of this fixture. When cutting or drilling into walls or ceilings, do not damage electrical wiring, gas lines, or water lines. If any of the fixture or wiring components are damaged, do not install fixture. Return to place of purchase. For fixtures provided with 75° C or 90° C supply wire warning only. (These warnings are provided on the U.L. label and on the fixture carton.) Risk of fire. Most dwellings built before 1985 have supply wires rated 60° C. Consult a qualified electrician before installing.

FIGURE 1

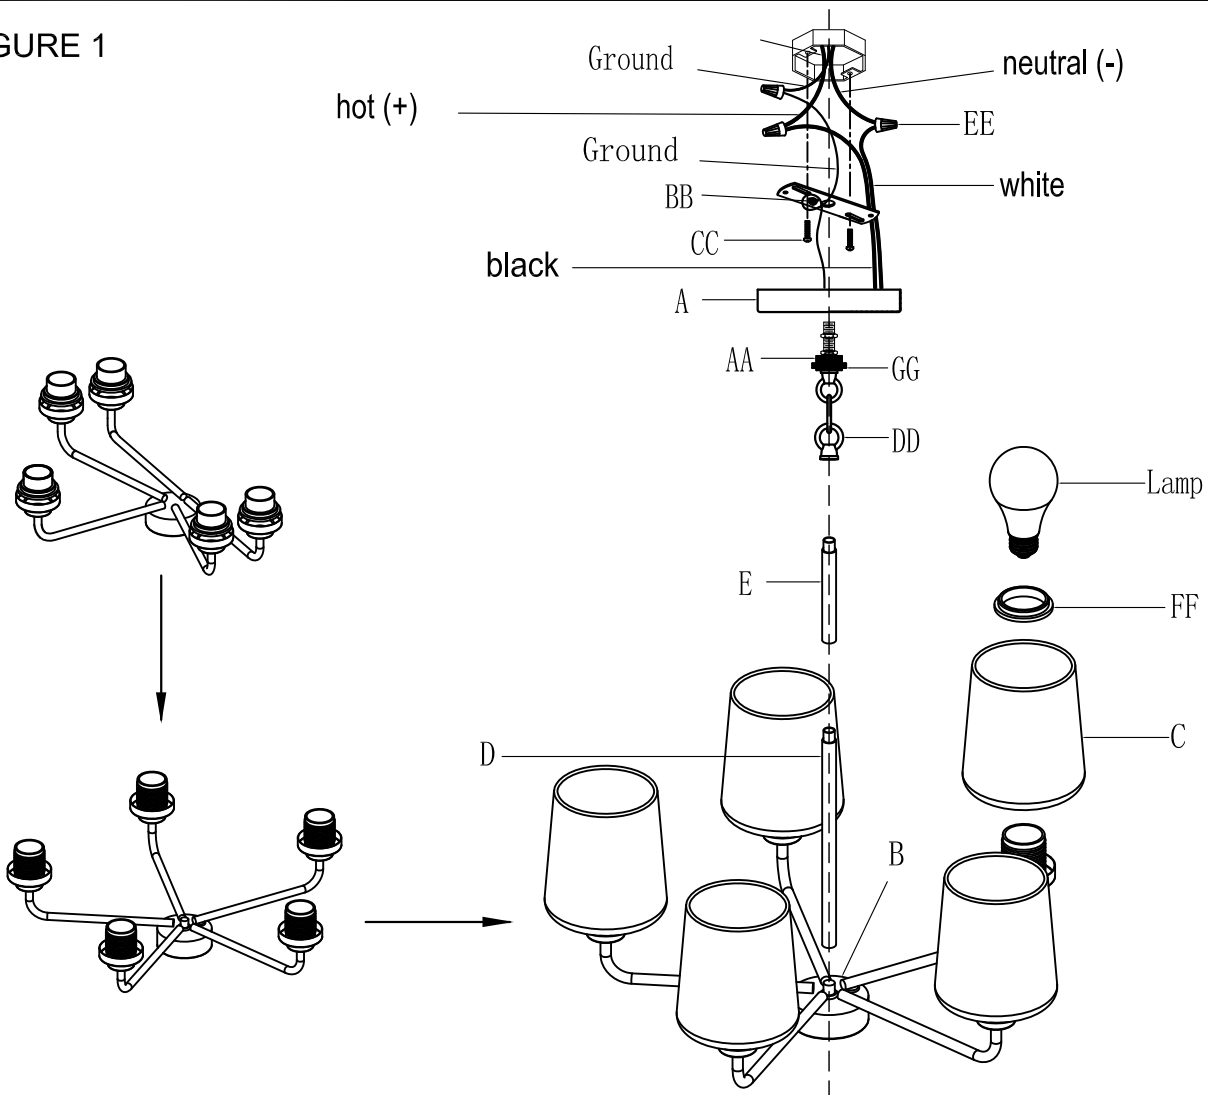

## 1 Assembling the fixture

- Determine the desired look and height of the fixture (B) and screw the 12" stems (D) and 6" stems (E). (Optional: screw the link and loop (DD) to the top stem).
- Tightly Install the screw collar (AA) onto the mounting plate(BB).
- Feed the fixture wires through the stems (D/E) and screw the stems (D/E) to the fixture (B).
- Slide the collar nut (GG) and canopy (A) over the stems(D/E)
- Feed the fixture wires through the collar nut (GG) threaded nipple/screw collar (AA) and mounting plate (BB) and screw the threaded nipple (AA) onto the stems (D/E) or link and loop (DD)

## 2 Installing the mounting plate

- Temporarily remove the collar nut (GG) from the screw collar (AA).
- Install the mounting plate (BB) by placing it over the junction box and aligning the slots to the mounting holes on the junction box.
- Secure the mounting plate (BB) with the two provided mounting screws (CC).

## 3 Wiring and mounting the fixture

- Wrap the middle of the ground wire from the fixture around the ground screw (BB) on the mounting plate (BB). Use a wire nut (EE) to connect the ground wire from the fixture to the ground wire from the outlet box.
- Connect the white (-) fixture wire to the neutral (-) power line wire with a wire nut (EE).
- Connect the black (+) fixture wire to the hot (+) power line wire with a wire nut(EE).
- Wrap the wire nut connections with electrical tape.
- Hold the canopy (A) up to the ceiling and secure it place by screwing the collar nut (GG) onto the screw collar (AA).

## 4 Installing the lamp and shade

- Place the shade (C) over the fixture (B) and secure it in place with the shade collar (FF).
- Screw the lamps (sold separately) into the socket. Refer to the socket label for max wattage information.

## Operation

- Turn on the power at the circuit breaker or fuse box.
- Turn on the light switch to activate the fixture..